

# LP12

Light and reliable platform with electric lifting



## LIFTING PLATFORM

The LP mobile platform allows to operate safely up to 5 meters with a maximum load of 120 kg. Equipped with 4 steering wheels with central locking system and 2 stabilizers, the unit is extremely lightweight thanks to the aluminum construction. The ergonomic design and the small size allow easy transport into the van and the workplace.



## LIGHTWEIGHT

The construction of the cage, mast and frame in aluminum together with the possibility to remove the ballast allow an easy product handling thanks to the extremely low weight.



## COMPACT DESIGN

The reduced overall product size and the ergonomic handles make the lifting platform easy to be carried through doors and elevators.




## SAFETY

The 4 heavy-duty castors with polyurethane ring are equipped with a central locking system easy to be operated through the dedicated foot pedal. The bubble surface level shows the operator the correct platform positioning.



## REMOVABLE BALLAST

The 4 ballast lower the platform center of gravity during the operation and are equipped with a fast disconnecting system to reduce the weight during the transport.

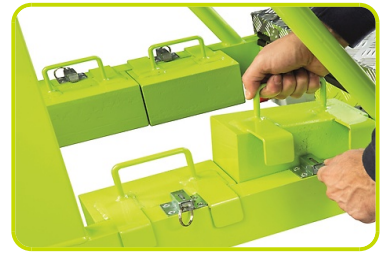


## OPERATOR CONTROL PANEL

Control Panel with key, lift / lowering control and emergency stop button offer an IP 54 protection for outdoor uses.



## BATTERY COMPARTMENT

The step is made of heavy-duty aluminum corrugated sheet that contains gel battery, on-board battery charger, main switch, emergency button, and a button to lower the cage.

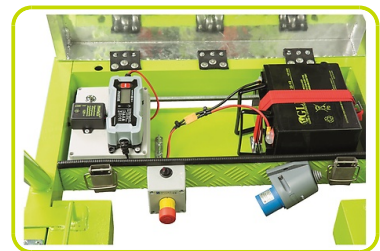

## Description

|                   |    |               |
|-------------------|----|---------------|
| Material          |    | Aluminum made |
| Lift              |    | Electric      |
| Drive             |    | Manual        |
| Load capacity     | Kg | 120           |
| Removable ballast |    | 4 x 15 kg     |
| Self-closing door |    | Yes           |

## Weight

|  |    |        |
|--|----|--------|
| Service weight (with/without ballasts) | Kg | 150/90 |
|--|----|--------|

## Tyres/Chassis


|   |    |       |
|---|----|-------|
| Tyres (Front/Rear)                          |    | PU/PU |
| Wheels, number front, rear (x=drive wheels) | n. | 2/2   |
| Central locking system                      |    | Yes   |
| Stabilizers                                 | n. | 2     |

## Dimensions

|                     |    |                |
|---------------------|----|----------------|
| Max platform height | m  | 3              |
| Overall dimensions  | cm | 70 x 118 x 195 |

## ELECTRIC ENGINE

|                                  |      |           |
|----------------------------------|------|-----------|
| Battery                          |      | Gel       |
| Battery voltage/nominal capacity | V/Ah | 12/39 C20 |
| Built-in charger                 |      | Yes       |
| Electric actuator                | N    | 1700      |
| Gas spring                       | N    | 1500      |

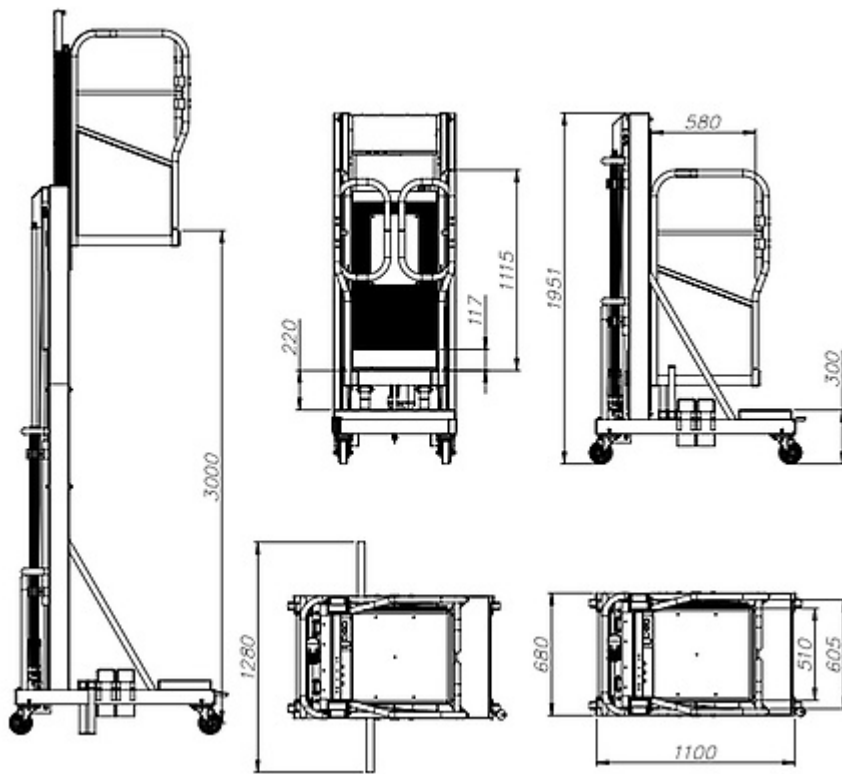

The information is aligned with the Data file at the time of download. Printed on 17/02/2022 (ID 13449)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

